AVK SWING CHECK VALVES WITH LEVER AND WEIGHT
PRESSURE LOSS, DN50, DN65, DN80 AND DN100

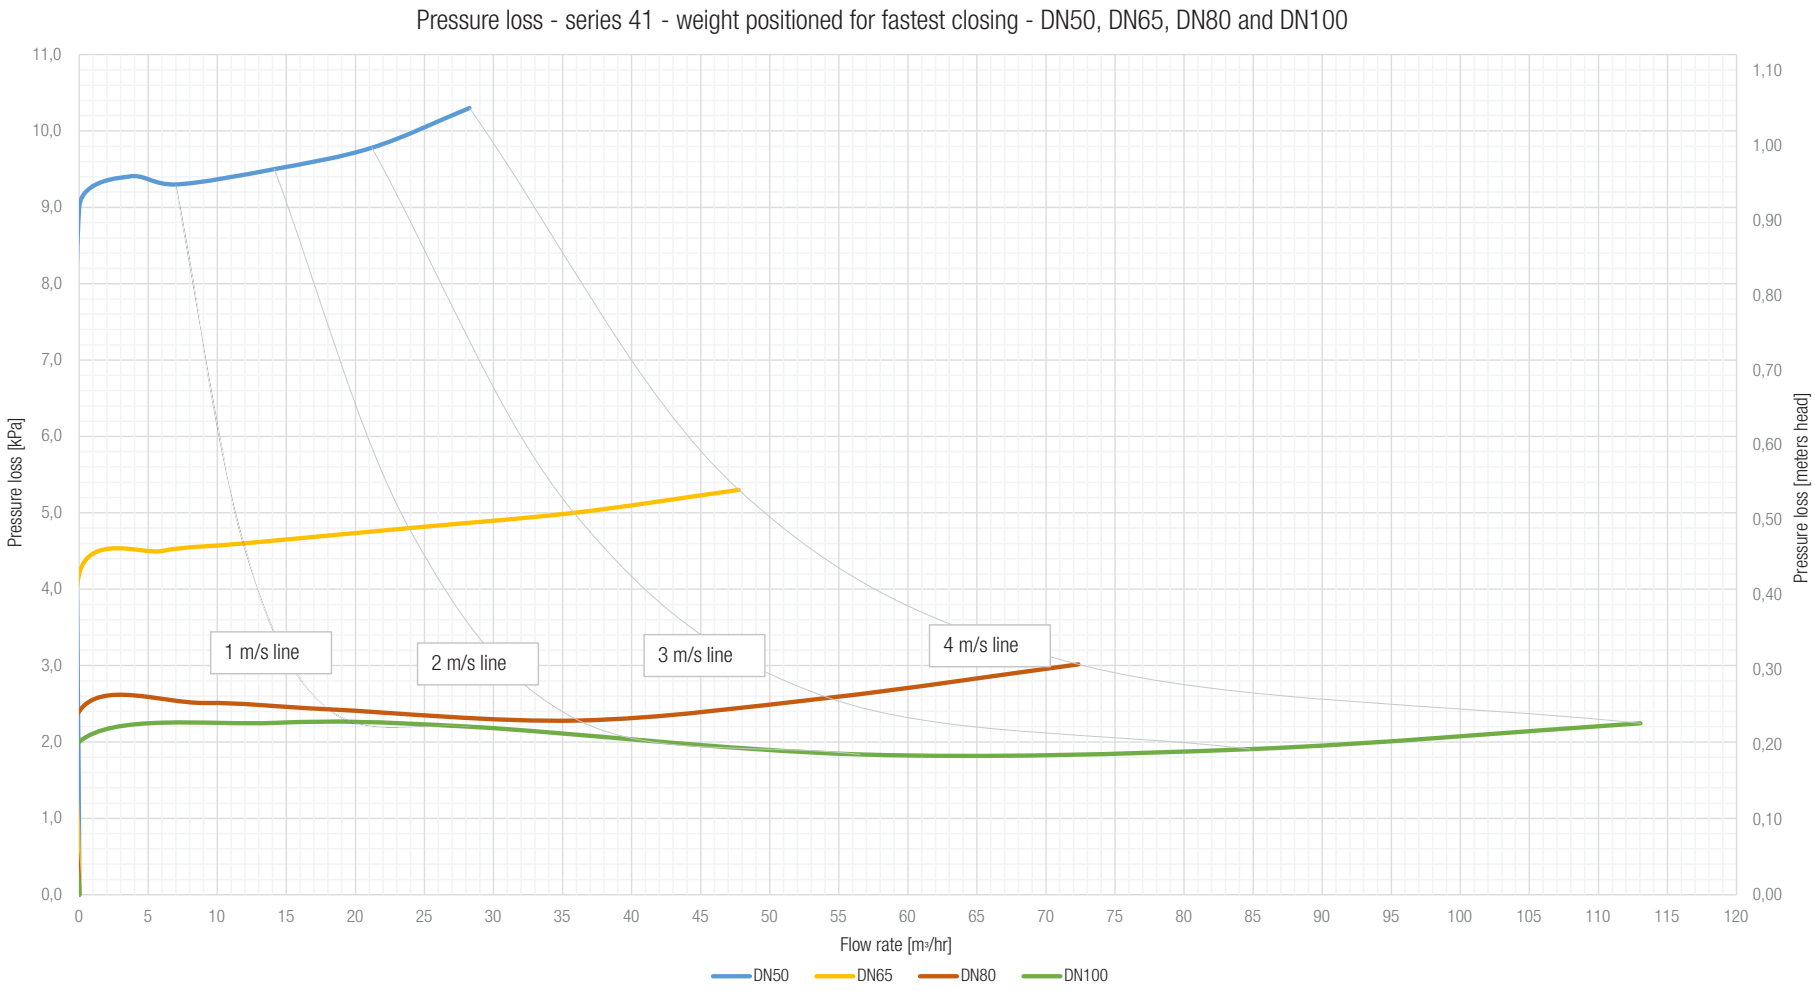

These curves are based on tests, performed according to EN1267, with a horizontal installation.

DN50, fully open check valve at approx. 7 m³/hr (0,99m/s) - DN65, fully open check valve at approx. 13 m³/hr - (1,09m/s) - DN80, fully open check valve at approx. 22m³/hr (1,22m/s) - DN100, fully open check valve at approx. 35 m³/hr (1,24m/s)

© 2026 AVK GROUP A/S - AVK INTERNATIONAL A/S, Bizonvej 1, DK-8464 Galten - www.avkvalves.eu

AVK SWING CHECK VALVES WITH LEVER AND WEIGHT
PRESSURE LOSS, DN125, DN150 AND DN200

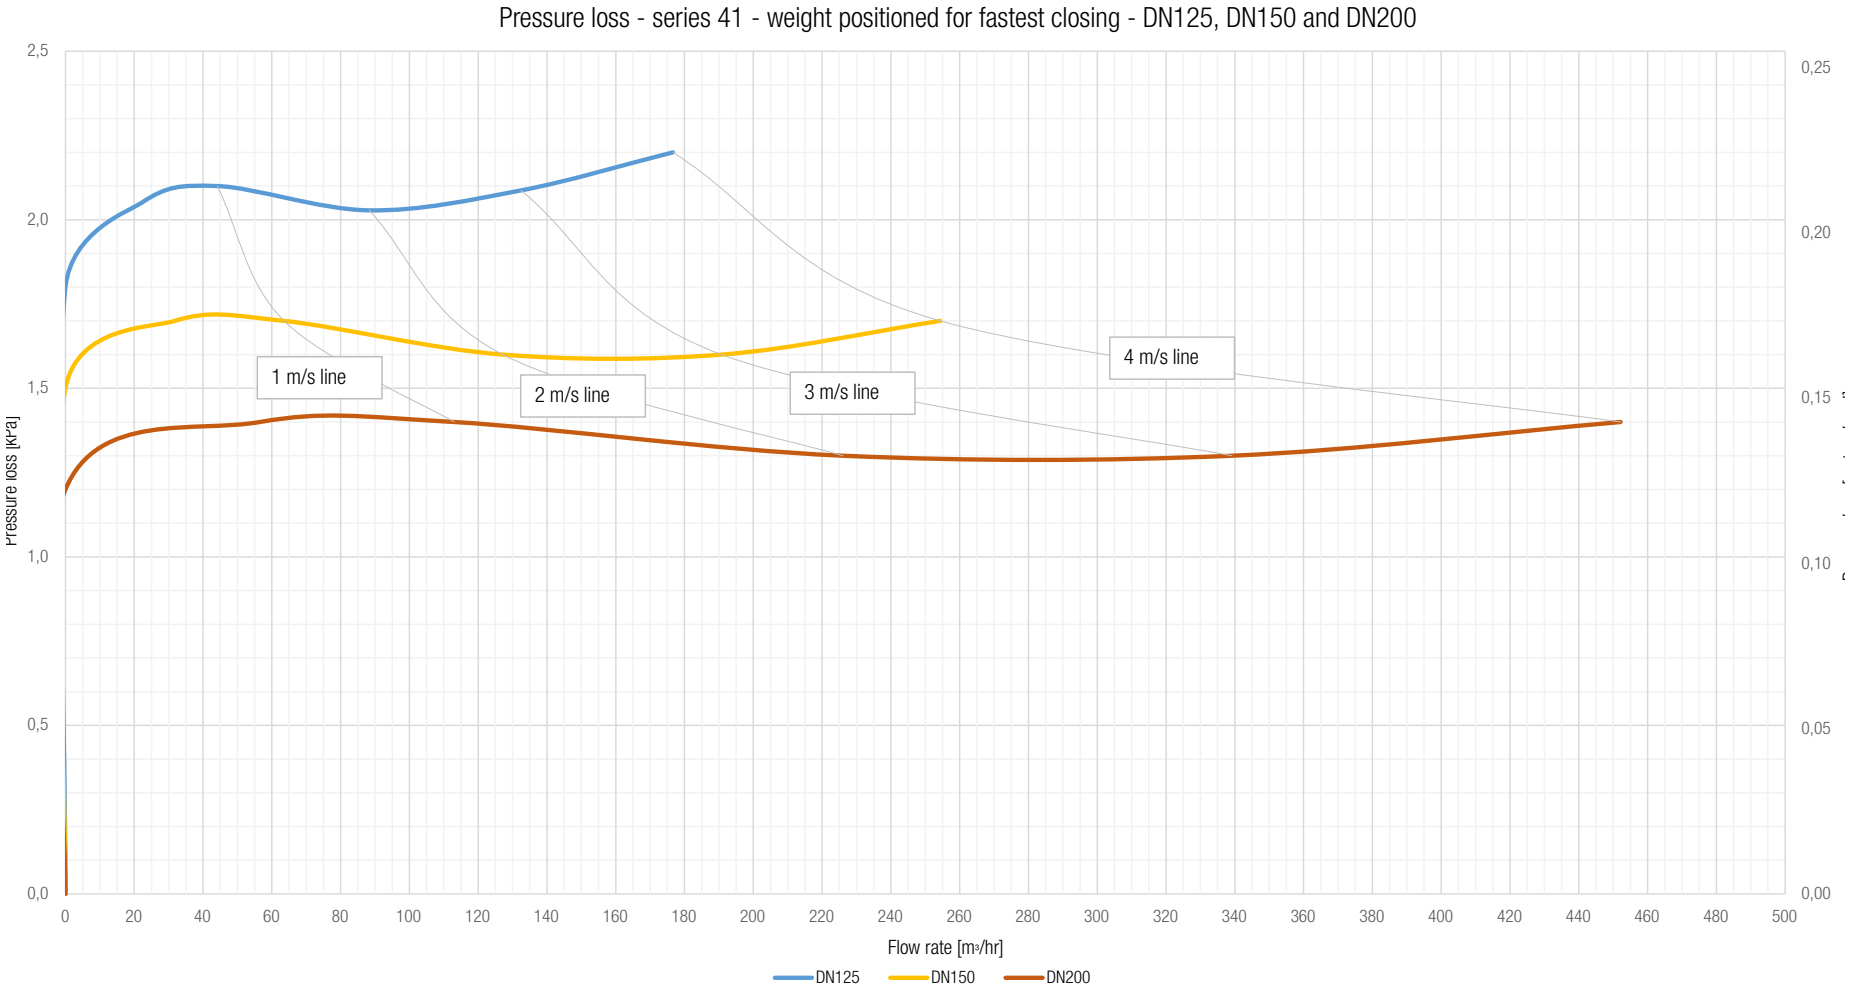

These curves are based on tests, performed according to EN1267, with a horizontal installation.

© 2026 AVK GROUP A/S - AVK INTERNATIONAL A/S, Bizonvej 1, DK-8464 Galten - www.avkvalves.eu

AVK SWING CHECK VALVES WITH LEVER AND WEIGHT
PRESSURE LOSS, DN250 AND DN300

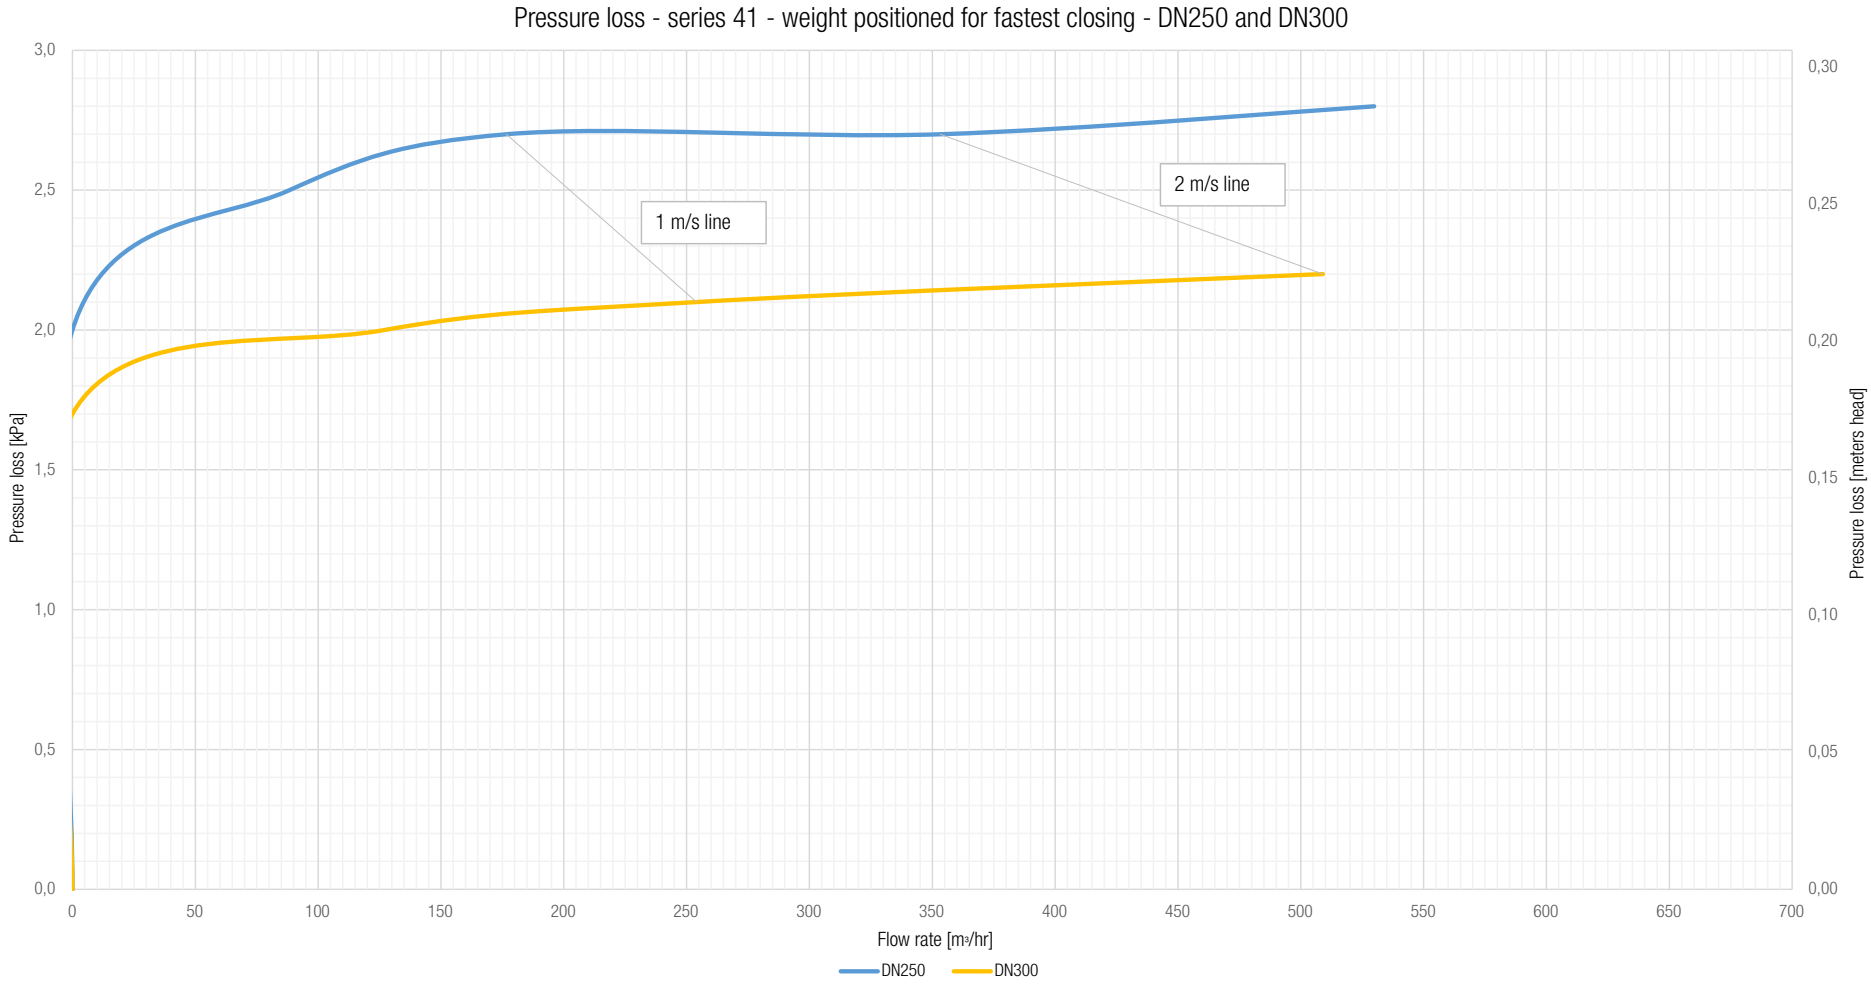

These curves are based on tests, performed according to EN1267, with a horizontal installation.

DN250, fully open check valve at approx. 220 m³/hr (1,24m/s) - DN300, fully open check valve at approx. 230 m³/hr - (1,30m/s)

© 2026 AVK GROUP A/S - AVK INTERNATIONAL A/S, Bizonvej 1, DK-8464 Galten - www.avkvalves.eu